

FLOS

Light Spring, Double - Specification Sheet by Ron Gilad, 2010

Mounting	Wall
Lamp (Bulb) Description	2 x 14 TOP LED 2700K - 568lm total CRI80 - 9W
Environment	Indoor - Dry Location
Dimming	Not dimmable
Finish	White
Technical and Product Description	LIGHT SPRING DOUBLE wall mounted light fitting with indirect light. Injection molded diffuser in methacrylate with photo-engraved internal finish. The diffuser is fixed to the body by a nickel-plated neodymium magnet. The head is cast aluminium alloy. The wall attachment is injection molded in NYLON PA 6.6 white 20% fibreglass. The rose is in cast aluminium alloy. The body is in extruded calendered aluminium. The feed for the LEDs is located within the rose. Each head can be rotated 45° on its vertical axis. The components are finished with a spray paint. The paint is water-based and therefore eco-friendly.


Electrical

Voltage	120
IP Rating	IP20


Physical

Construction Material	Aluminum, Methacrylate
Weight	2.6 lbs



 FU334409 White

Dimensional Image

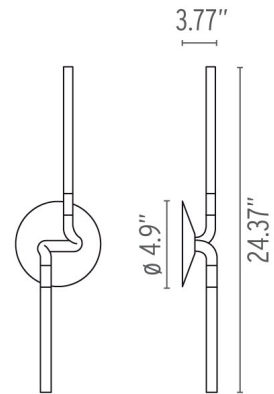

Certifications



ADA