

# FLOS

## Ray S, Grey Glass - Specification Sheet by Rodolfo Dordoni, 2007


Mounting	Ceiling Pendant
Lamp (Bulb) Description	1 x 250W T-10 Medium Frosted Halogen (Included)
Canopy Dimension	Diameter 4.92"
Environment	Indoor - Dry Location
Dimming	Phase-cut Dimming / Triac Type
Finish	Grey Glass
Technical and Product Description	RAY S pendant lamp providing direct or diffused lighting. Chrome-plated metal structure and lathe-shaped aluminum diffusers, painted white on the inside, and shiny white or black on the outside or gray-colored, blown and overlaid glass with glossy external finish. Liquid paint glossy protection. Opal blown glass inner diffuser. White painted steel ceiling attachment protected with transparent paint, and polished aluminum cover.

### Electrical

Voltage	120
Switching	NA
IP Rating	IP20


### Physical

Cord Length (inches)	106" - Clear
Construction Material	Aluminum, Glass, Polycarbonate, Steel
Weight	15 lbs

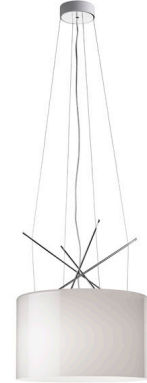

FU593420 Grey Glass

### Dimensional Image



### Certifications



### Lamping (Bulb)



250W T-10 Medium Frosted Halogen

### Lamping (Bulb)



LED018 PRO-T38LED 14W 120V E26 2700K  
DIMM - 1800lm - CR180 Additional

### Lamping (Bulb)



LED031 PRO-T38LED 14W 120V E26 3000K  
Dimmable - 1800lm - CR180- Additional